


# Junior & Mini Mite

ASSEMBLY INSTRUCTIONS  
*Arizona Sports Equipment*  
P. O. BOX 30508, TUCSON, AZ. 85751 (800) 861-8628

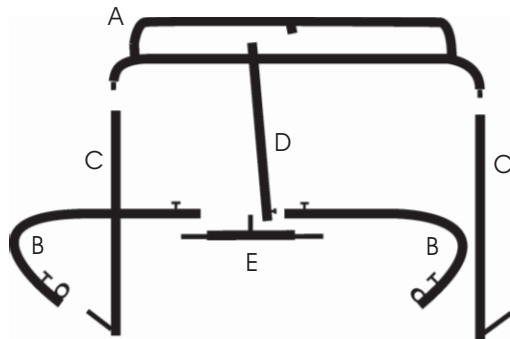


## CONTENTS:

- A- Top assembly with netting
- B- Two Base Halves
- C- Two upright posts
- D- Diagonal upright support
- E- Base Tee

One Roll skirting  
Two lengths 9' cord

1. BEGIN BY ASSEMBLING TWO BASE PIECES, ALL FITTINGS FACING UP, WELDED WASHERS TOWARDS THE FRONT, ON A FLAT, STURDY SURFACE. INSERT TEE INTO EACH BACK END OF BASE PIECE. SNUG 7/16" BOLT ONLY, THIS WILL BE TIGHTENED LATER FOR PROPER ANGLE.
2. INSERT EACH OF THE THREE UPRIGHTS FULLY INTO FITTINGS. SNUG 7/16" BOLTS TO SECURE-DO NOT OVER TIGHTEN! ALL THREE UPRIGHTS SHOULD NOW BE IN PLACE WITH THE SILVER PIECE IN CENTER. LOOSE UPRIGHTS MIGHT SWING DOWN, SO PLEASE USE CAUTION.
3. CAREFULLY PLACE TOP ASSEMBLY ONTO UPRIGHTS. KEEP NETTING TO THE OUTSIDE OF THE FRAME AND SLIDE INTO PLACE. THIS IS MUCH EASIER IF EACH FITTING IS INSERTED SIMULTANEOUSLY. TOP OF GOAL SHOULD APPEAR LEVEL. SECURE BOLTS AT TEE WITH NO MORE THAN ONE TURN AFTER CONTACT.
4. BE SURE NET IS HANGING FREELY ON OUTSIDE OF GOAL. ONE WIRE HOOK OR TURNBUCKLE SHOULD NOW HANG ALONG EACH POST. GENTLY TUG NETTING FROM TOP CORNER TO BASE TO DETERMINE AMOUNT OF NETTING TO BE THREADED ALONG CABLE. HOOK ONE END INTO THE WELDED WASHER AT THE END OF THE BASE OF THE GOAL. THEN HOOK THE OTHER SIDE. ROTATE THE TURNBUCKLE TO TIGHTEN CABLE. NO NEED TO OVER-TIGHTEN. THE CABLE SHOULD RUN ALONG POSTS AND APPEAR STRAIGHT. THE NETTING WILL BE HOOKED IN AS WELL, PLEASE ADD OR SUBTRACT NETTING AS NECESSARY TO PROVIDE PROPER FIT. HOOK ONLY ENOUGH TO REACH BOTTOM OF GOAL.
5. TURN GOAL FACE-DOWN AND BEGIN LACING NET TO BASE WITH ONE 7' CORD. START AT CENTER OF BASE AT THE "T". CENTER NET. LOOP NETTING TO BASE IN AN OVER-HAND MOTION. CONTINUE TOWARDS THE CORNER, TUGGING NET ALONG TOWARDS THE FRONT AS YOU GO. TIE SECURELY AT FRONT AND REPEAT WITH OTHER SIDE.

Skirting wraps around base, sandwiching the netting in between. This will provide protection inside and out. Begin lacing at center base Tee out to posts. Allow to 'pucker' in corners as it follows the curve. Tie with overhand knots as you go along. Skirting does not reach posts completely, as to not impede pucks.

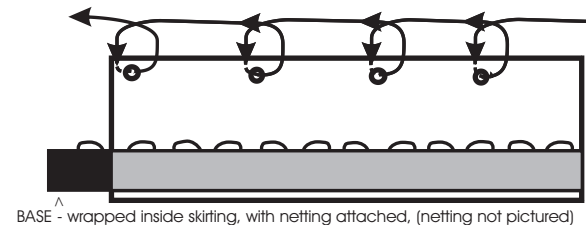

TO DISASSEMBLE GOAL FOR EASY STORAGE, BEGIN BY LOOSENING TURNBUCKLE AND UN-HOOKING EACH SIDE. THESE SHOULD BE FINGER-TIGHT ONLY. NOW LOOSEN ALL 7/16" - BOLTS. TOP PORTION OF GOAL CAN NOW BE LIFTED OFF POSTS AND SET DOWN ON BASE WHILE ALLOWING PIPES TO PASS THRU NETTING. RE-ASSEMBLE BY REVERSING PROCESS.

TO PROLONG LIFE OF THE NETTING, KEEP FROM DIRECT SUNLIGHT WHEN NOT IN USE. AVOID DRAGGING GOAL ALONG ABRASIVE SURFACES.