


Junior/Mini-Mite Tournament Style


ArizonaSportsEquipment.com
P.O. Box 30508 Tucson, AZ 85751
800-861-8628

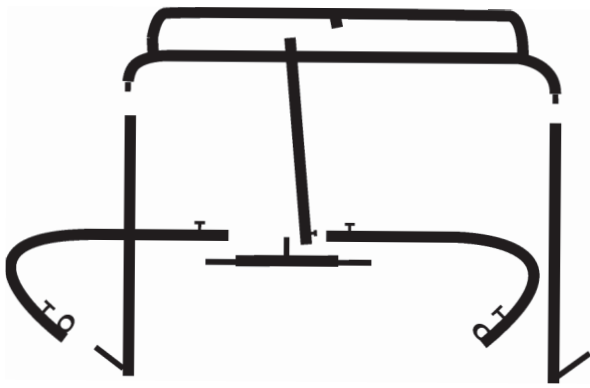

Contents:

- (1) Top Assembly with Net
- (2) Equal Posts
- (2) Base Halves
- (1) T-bar (Diagonal Support/Base Tee combined)
- (4) Lengths of 9 inch cord
- (1) Roll Skirting


1. Begin with the two base pieces on a flat, sturdy surface, all fittings facing up, white tips toward the front posts. Insert base tee into each end of rear base pieces, then measure so the goal mouth opening between base elbows is 36" for Mini-Mite or 52" for Junior. Snug bolts, but DO NOT FULLY SECURE! The securing of all bolts will be finished at the end.
2. Insert each of the red post stems fully into fittings. Snug bolts, but do not fully secure. At this point, you should now have both posts and the T-bar upright.
3. Carefully place top assembly onto posts and T-bar, best done simultaneously, make sure to keep netting to the outside. After sliding into place, top of goal should appear level. Now, secure all bolts with no more than one turn after contact!

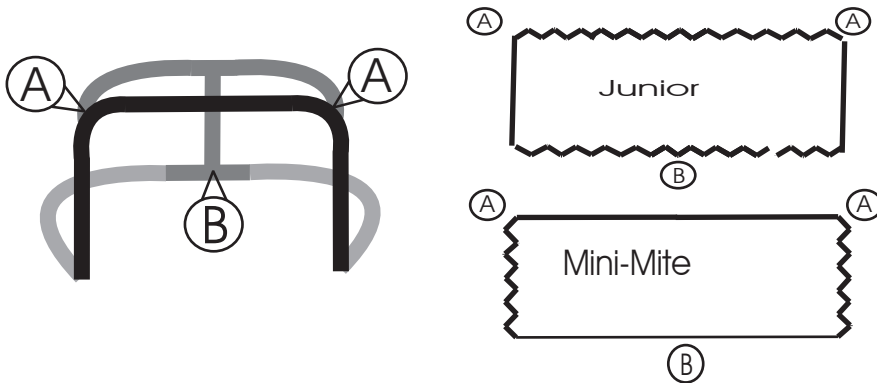

Tie netting top corners (A.) to each top corner (A.) of goal. (VERY IMPORTANT!) The smooth edge of net is top and bottom for Mini-Mite and sides for Junior. Find center of bottom edge of netting (B.) by counting 'selvages' (net loops) from one bottom corner to the other. Tie centered netting to base at tee (B.).

Begin lacing base at tee (B.) tugging netting towards post to get maximum lateral length. Do one side, then the other. While wire loops may correspond to selvages along top, they will not along sides and base. Next, do the same at the crossbar, start at the center as well. Do one side, then the other. Lastly, lace up posts, bases to top shelf.

Skirting wraps around base, sandwiching the netting in between. This will provide protection inside and out. Begin lacing at center base tee (B.) out to posts, best done with overhand knots. Allow the "puckering" in corners as it follows the curve. Skirting does not reach posts completely, as to not impede pucks.

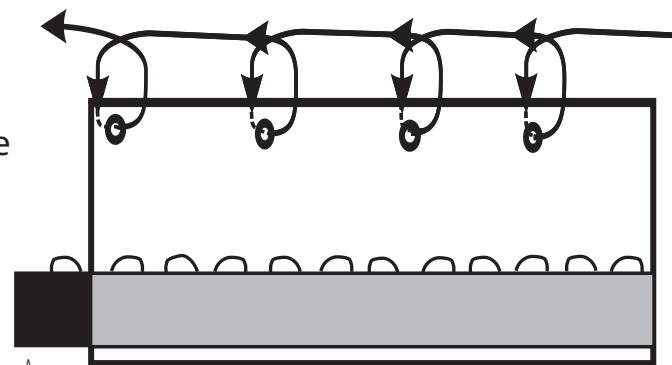

BASE - wrapped inside skirting, with netting attached, (netting not pictured)